

GUMO D



GUMO D DETAILS

GUMO D the distance band for optimum ventilation which eliminates the risk of waterlogging between decking boards and substructure.



The slim design of only 15 mm width permits [minimal contact area between the top surface and substructure] perfect constructive protection.

The 7mm distance permitted by GUMO D protects the screws from sheering when boards naturally swell and shrink.


The grooved surface has a damping effect and optimal clamping [pressure] during the screwing of boards. The distance band can also be screwed through.

The solid band can absorb extremely high pressure loads caused by the tensile forces of the screws during installation. Preventing the risk of an uneven surface.

A simple and fast assembly process is achieved by the practical and handy roll with a length of 10 meters.

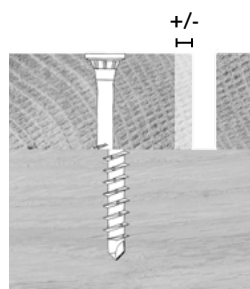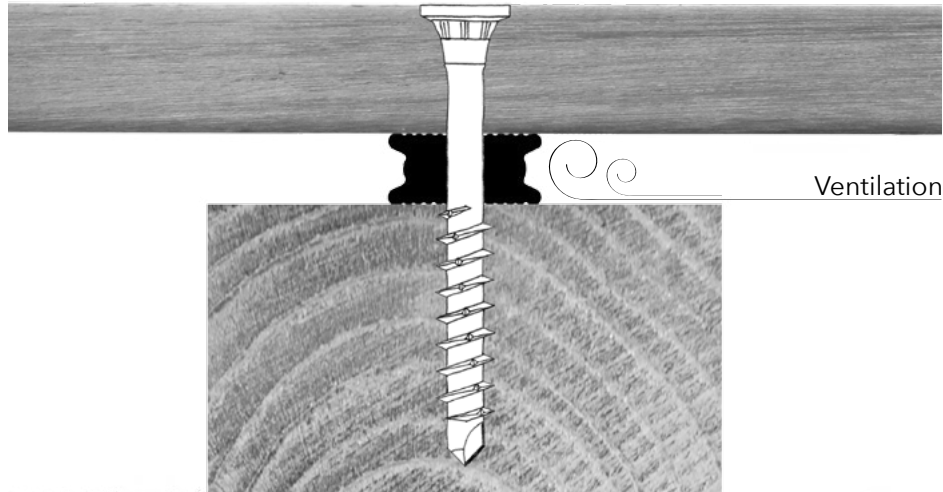


✘
Sheering
without GUMO D

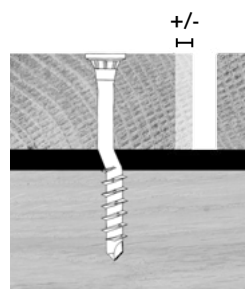

✔
GUMO D reduces the
sheering effect by 50%

GUMO D HIGHLIGHTS

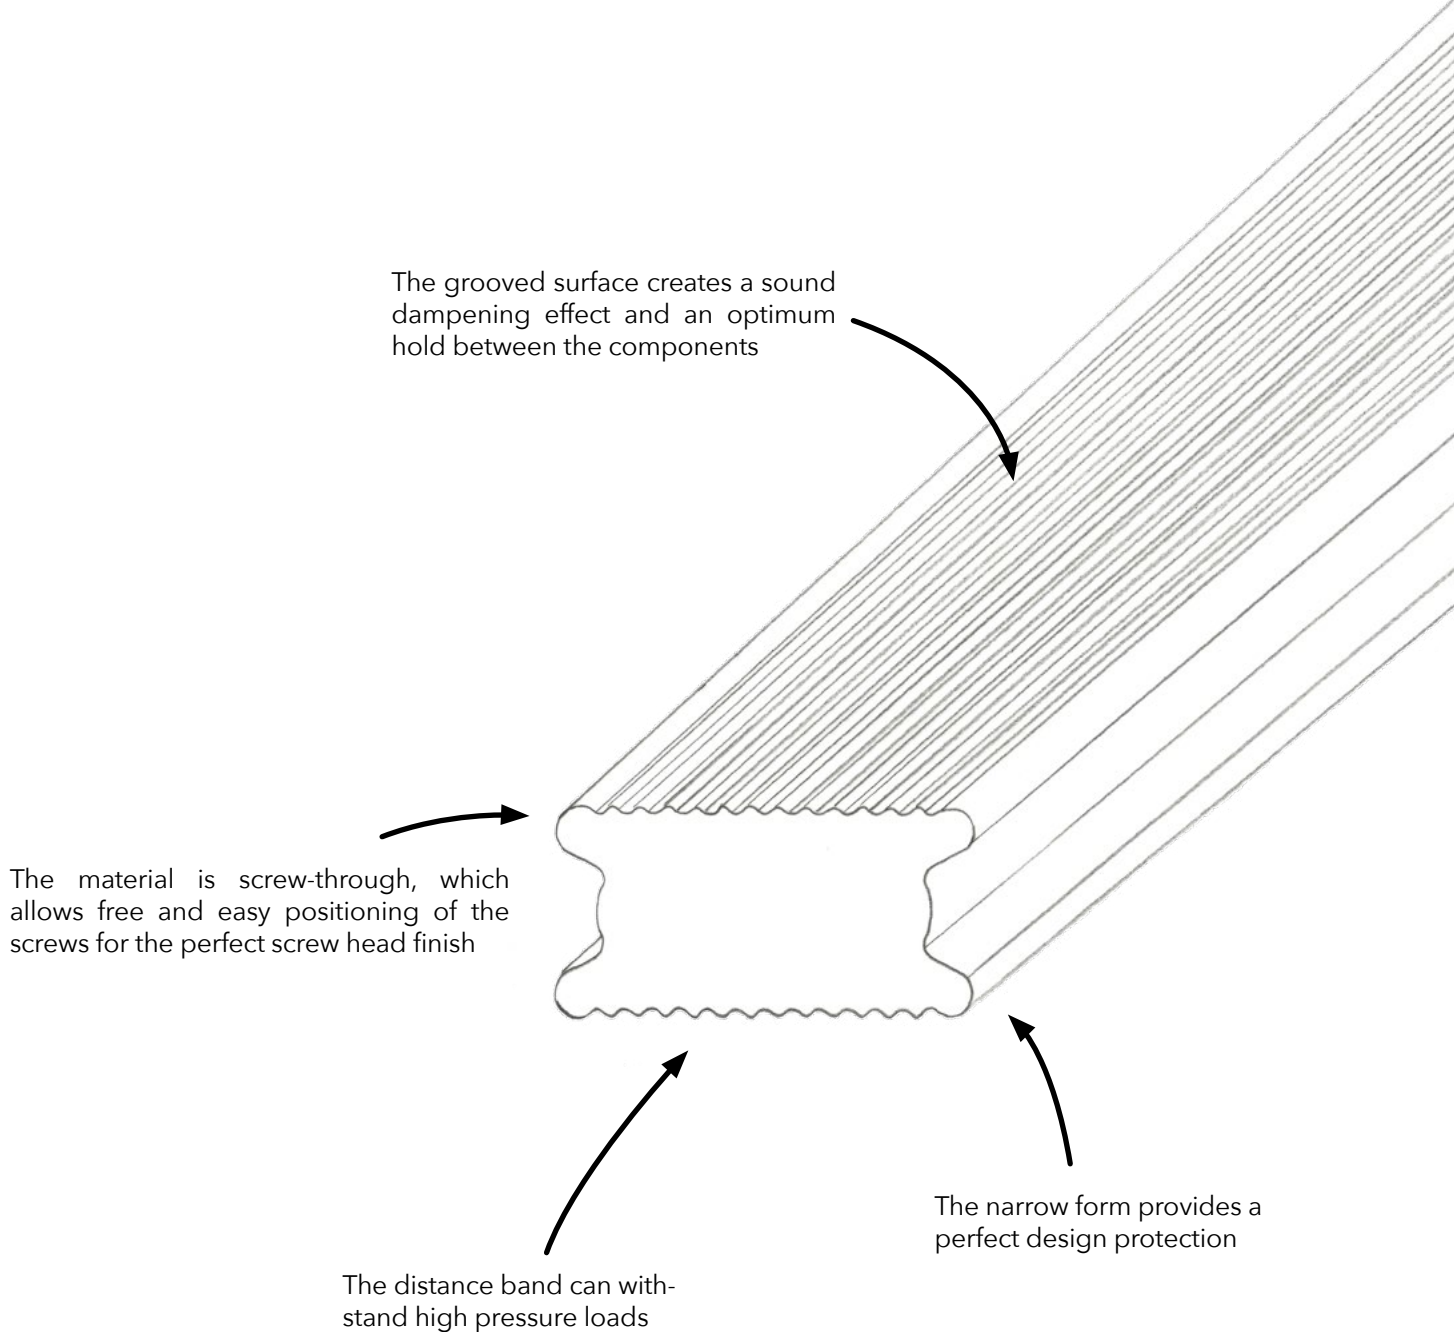


OVERVIEW

Fixing:	spacer for visible screw connections
Length:	10 m Roll
Width:	15 mm
Height:	7 mm
Material:	extruded plastic
Special feature:	sound dampening effect

GUMO D

DISTANCE BAND

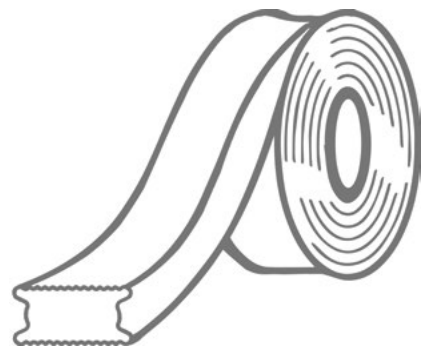

Product No.	Description 1	Description 2	Packing Unit
007113000	GUMO D distance band	15 x 7 mm	PU 8x10 RM