

TIGA




TIGA DETAILS

The facade clip **TIGA** guarantees easy, fast and safe installation.

By engaging behind the board using the TIGA concealed fixing the facade surface remains protected from weather impacts.

The positioning guide allows a simple seating for the facade board which automatically permits a uniform gap distance.


The fastening system is characterized by a sliding and fixed point installation: Natural swelling and shrinking movements are optimally controlled and compensated.

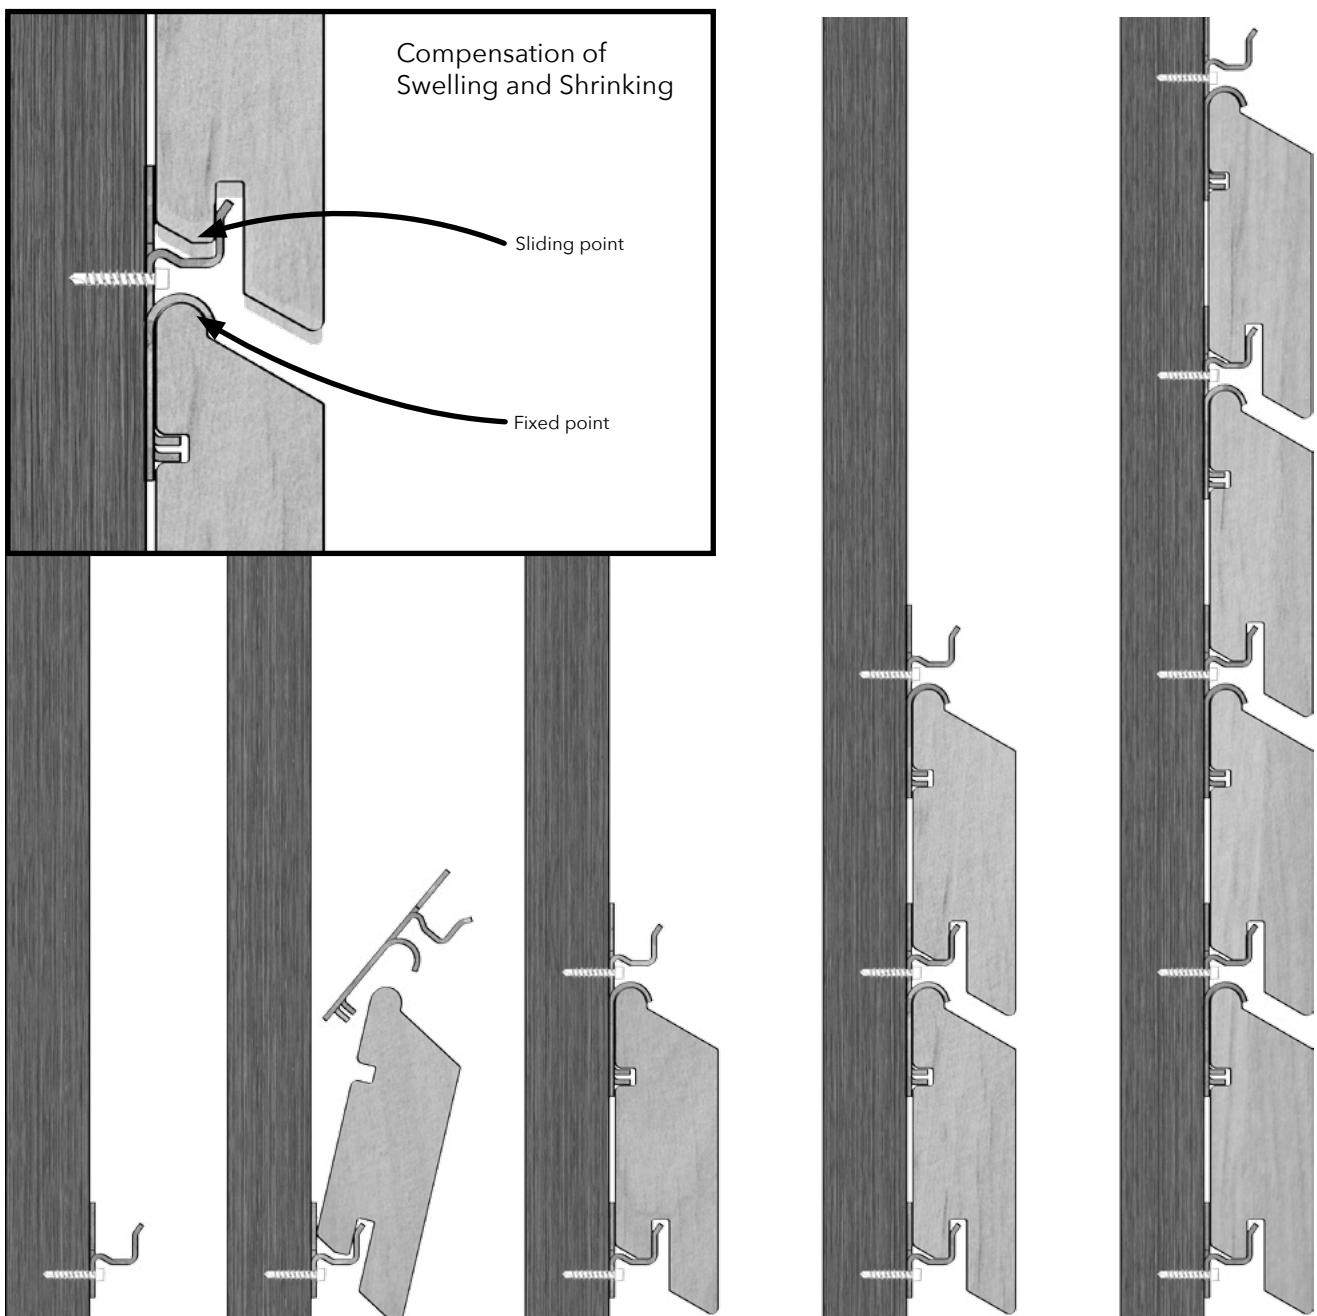

TIGA HIGHLIGHTS


Integrated positioning guide for easy mounting of facade boards.

A single screw saves time during installation and ensures a perfect hold

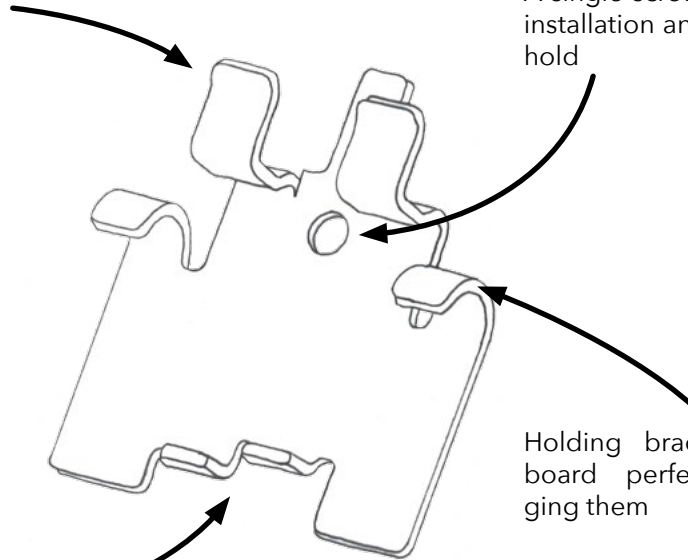

Holding brackets stabilize the board perfectly without damaging them

Snap mechanism for intuitive and screwless mounting of the boards

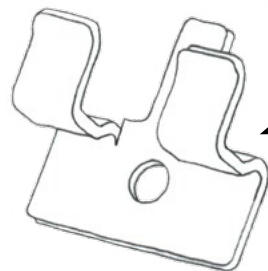

Separate starter piece to mount the first board

OVERVIEW

Fixing:	concealed system
Fixing type:	sliding and fixed point
Space distance:	fixed positioning guide
Facade board:	special TIGA profile
Fire protection:	according to metal material
Material:	Alu-zinc or stainless steel A2
Accessories:	start component Alu-zinc or stainless steel A2
UNIA drilling cap.:	ca. 2 mm thick Aluminium
Special feature:	system screws are always included

System screw
UNIA included

including integrated
selftapping point



TIGA

FACADE SYSTEM



Product No.	Description 1	Description 2	Packing Unit
005804002	TIGA facade connector	aluminium zinc	PU 100 PCS
005811000	TIGA facade connector	aluminium zinc	PU 400 PCS
005812000	TIGA facade connector	aluminium zinc	PU 800 PCS
006202002	TIGA S facade connector, starter piece	aluminium zinc	PU 50 PCS

The required UNIA1 system screws 4,2 x 28 mm and instructions are included in every package



Product No.	Description 1	Description 2	Packing Unit
006004000	TIGA2 facade connector	stainless steel A2	PU 100 PCS
006011000	TIGA2 facade connector	stainless steel A2	PU 400 PCS
006012000	TIGA2 facade connector	stainless steel A2	PU 800 PCS
006302000	TIGA2 S facade connector, starter piece	stainless steel A2	PU 50 PCS

The required UNIA1 system screws 4,2 x 28 mm and instructions are included in every package